


PRESINOX 14800

GAS CONNECTORS

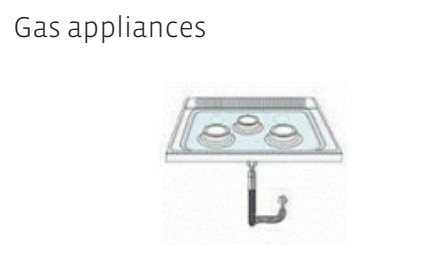

Applications

CHARACTERISTICS AND TECHNICAL SPECIFICATIONS

Dn	Outer diameter	Inner diameter	Fitting inner diameter	Flow rate	Minimum bending radius	Working pressure
12	20 mm	12 mm	08 mm	>1.5 m ³ /h	no limit	0,5 bar


H2o potable: No

FITTINGS

Dn	Nut G	Male 12
-	1/2"	1/2"



MATERIALS

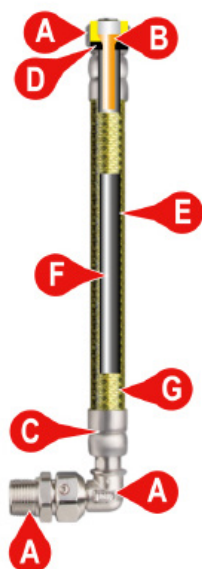

- A. Brass
- B. Brass
- C. Stainless steel
- D. Incorporated EPDM
- E. Poliolefine
- F. Stainless steel

PRESINOX 14800 Rev. 01