


PRESINOX 14800 GLP

GAS CONNECTORS



Movable GL
Bottles



Applications

TECHNICAL SPECIFICATIONS


Dn	Flow rate	Working pressure
12	>1,3 kg/h	0,5 bar

H2o potable: no

FITTINGS

Dn	Nut G	Nut M
-	1/2"	20X1,5

MATERIALS

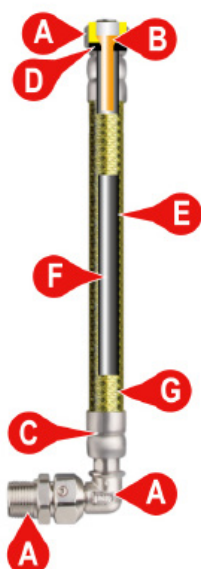

- A. Brass
- B. Brass
- C. Stainless steel
- D. Incorporated EPDM
- E. Poliolefine
- F. Stainless steel

PRESINOX 14800 GLP Rev. 01