



PRESINOX EXTENSIBLE - (DN 12 - DN 25)

GAS CONNECTORS

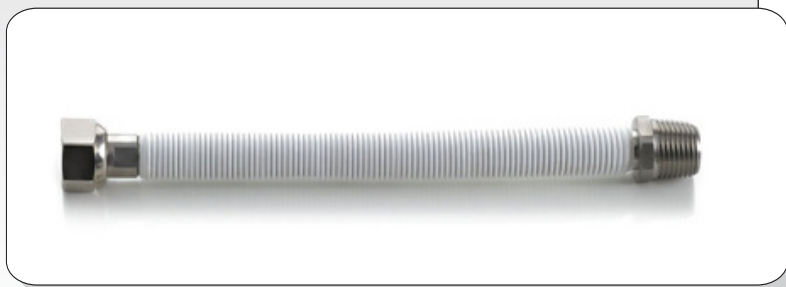

Fixed gas appliances



Applications

CHARACTERISTICS AND TECHNICAL SPECIFICATIONS

Dn	Outer diameter	Inner diameter	Minimum bending radius	Working pressure
12	19 mm	12 mm	31 mm	0,4 bar
20	31 mm	20 mm	47 mm	0,4 bar
25	36 mm	25 mm	55 mm	0,4 bar

H2o potable: no

MATERIALS



- A. Brass
- B. EPDM
- C. Stainless steel
- D. Poliolefine
- E. Stainless steel

FITTINGS

Dn	Nut	Male	H
12	1/2" 3/4"	1/2" 3/4"	20X1,5
20	3/4"	3/4"	—
25	1"	1"	—

