



PRESINOX EXTENSIBLE ECO- (DN 12, DN 16) GAS CONNECTORS

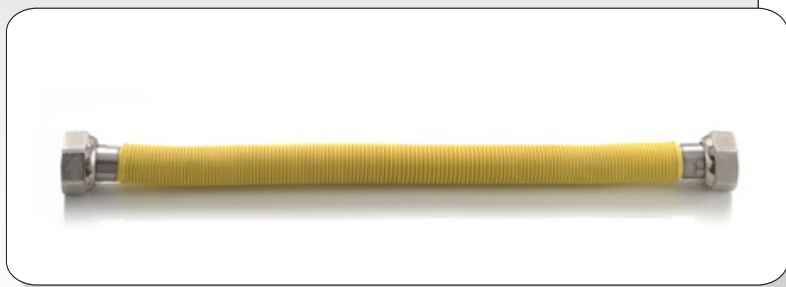

Fixed gas appliances



Applications

CHARACTERISTICS AND TECHNICAL SPECIFICATIONS

Dn	Outer diameter	Inner diameter	Minimum bending radius	Working pressure
12	18 mm	12 mm	30 mm	0,4 bar
16	27 mm	20 mm	45 mm	0,4 bar

H2o potable: no

FITTINGS

Dn	Nut	Male
12	1/2" 3/4"	1/2" 3/4"
20	3/4"	3/4"



MATERIALS



- A. Brass
- B. EPDM
- C. Stainless steel
- D. Poliolefine
- E. Stainless steel

PRESINOX-EXTENSIBLE ECO Rev.01