

Stainless steel braided connectors

# TAQ FORTE (DN11)



系列主要适用于1/2接头，水流要求小于50升每分钟的节能型取暖器和锅炉

*This range is specially designed for heaters and boilers of 1/2" that require volumes of flow at less than 50 l/min with minimum loss of energy.*



## 应用 Applications

Heaters and boilers



## 技术参数 Characteristics and technical specifications

- 外径**  
**Outer diameter:** 16 mm
- 内径**  
**Inner diameter:** 11 mm
- 内孔直径**  
**Fitting inner diameter:** 8,5 mm
- 3巴压力下水流量**  
**Flow rate:** 50 l/min at 3 bar
- 最小弯曲度**  
**Minimum bending radius:** 35 mm
- 最大工作压力**  
**Working pressure:** 10 bar
- 最高工作温度**  
**Working temperature:** 90 °C
- 饮用水**  
**H<sub>2</sub>O potable:** Yes

## 接头 Fittings

**Dn: 11**



**Nut G**

1/2"



**Male G**


1/2"



**Elbow**

1/2"

## 材料 Materials

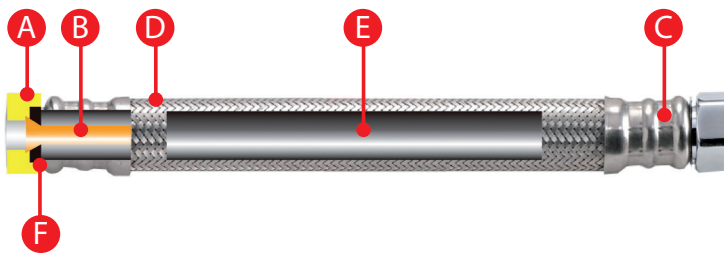

- A** 铜加镍电镀 /Nickel-plated brass
- B** 铜合金/Brass
- C** 美标304/Stainless steel AISI304
- D** 不锈钢美标304/Stainless steel wires AISI304
- E** EPDM
- F** 三元乙丙橡胶/ Incorporated EPDM