

TAQ SUPER 15 CALORIFUGADO

STAINLESS STEEL BRAIDED CONNECTORS



Heaters and air conditioning



Applications

CHARACTERISTICS AND TECHNICAL SPECIFICATIONS

Dn	Outer diameter	Inner diameter	Fitting inner diameter	Flow rate	Minimum bending radius	Working pressure	Working temperature
15	22 mm	15 mm	12,5 mm	95 lit/mit at 3 bar	55 mm	10 bar	110°C


F H2o potable: no

FITTINGS

Dn	Nut G	Male G
15	1/2" 3/4"	1/2" 3/4"

MATERIALS

TAQ SUPER 15 CALORIFUGADO Rev. 01

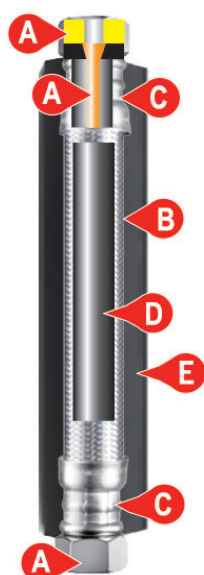

- A. Nickel-plated brass
- B. Stainless steel wires AISI304
- C. Stainless steel AISI304
- D. EPDM
- E. EPDM INSULATION