

TAQ - TP PULL OUT DN8

POLYMER CONNECTOR



Kitchen faucets, bath tubes and showers




Applications

CHARACTERISTICS AND TECHNICAL SPECIFICATIONS

Dn	Outer diameter	Inner diameter	Fitting inner diameter	Flow rate	Minimum bending radius	Working pressure	Working temperature
8	12 mm	08 mm	06 mm	20 lit/mit at 3 bar	20 mm	5 bar	70°C

H2o potable: yes

MATERIALS

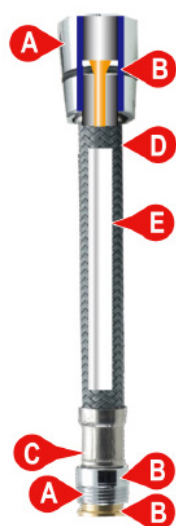

- A. Chromed brass
- B. Brass
- C. Stainless steel AISI304
- D. Nylon wire
- E. EPDM
- Iron coated weight (Optional)

FITTINGS

Dn	Conical nut G	Male M	Hex nut G
8	1/2"	15x1	1/2"

TAQ PULL OUT DN8 Rev. 01