

Stainless steel braided connectors

# TAQ SUPER (DN13)




系列主要适用于1/2或3/4接头，水流要求小于70升每分钟的取暖器，锅炉以及空调系统。

*This range is specially designed for heaters, boilers and air-conditioning systems of 1/2" or 3/4" that require volumes of flow at less than 70 l/min.*



## 应用 Applications

Heaters, boilers and air conditioning

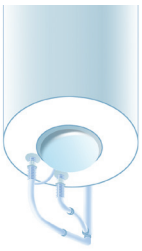

## 技术参数 Characteristics and technical specifications

- 外径**  
**Outer diameter:** 17 mm
- 内径**  
**Inner diameter:** 13 mm
- 内孔直径**  
**Fitting inner diameter:** 10 mm
- 3巴压力下水流量**  
**Flow rate:** 70 l/min at 3 bar
- 最小弯曲度**  
**Minimum bending radius:** 45 mm
- 最大工作压力**  
**Working pressure:** 10 bar
- 最高工作温度**  
**Working temperature:** 90 °C
- 饮用水**  
**H<sub>2</sub>O potable:** Yes

## 接头 Fittings

**Dn: 13**



**Nut G**

1/2"	3/4"
------	------



**Male G**

1/2"	3/4"
------	------



**Elbow**


1/2"	3/4"
------	------



**Smooth tube**

Ø15	Ø22
-----	-----

## 材料 Materials

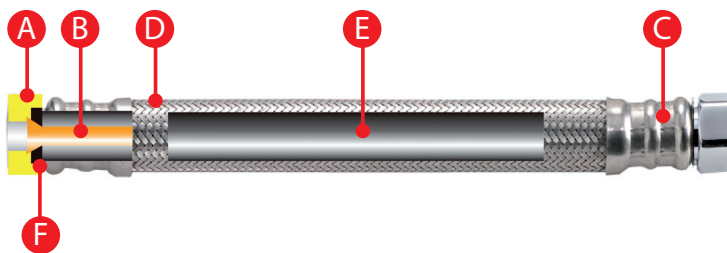

- A** 铜加镍电镀 /Nickel-plated brass
- B** 铜合金/Brass
- C** 美标304/Stainless steel AISI304
- D** 不锈钢美标304/Stainless steel wires AISI304
- E** EPDM
- F** 三元乙丙橡胶/  
Incorporated EPDM